


**SEE  
THE  
LIGHT**

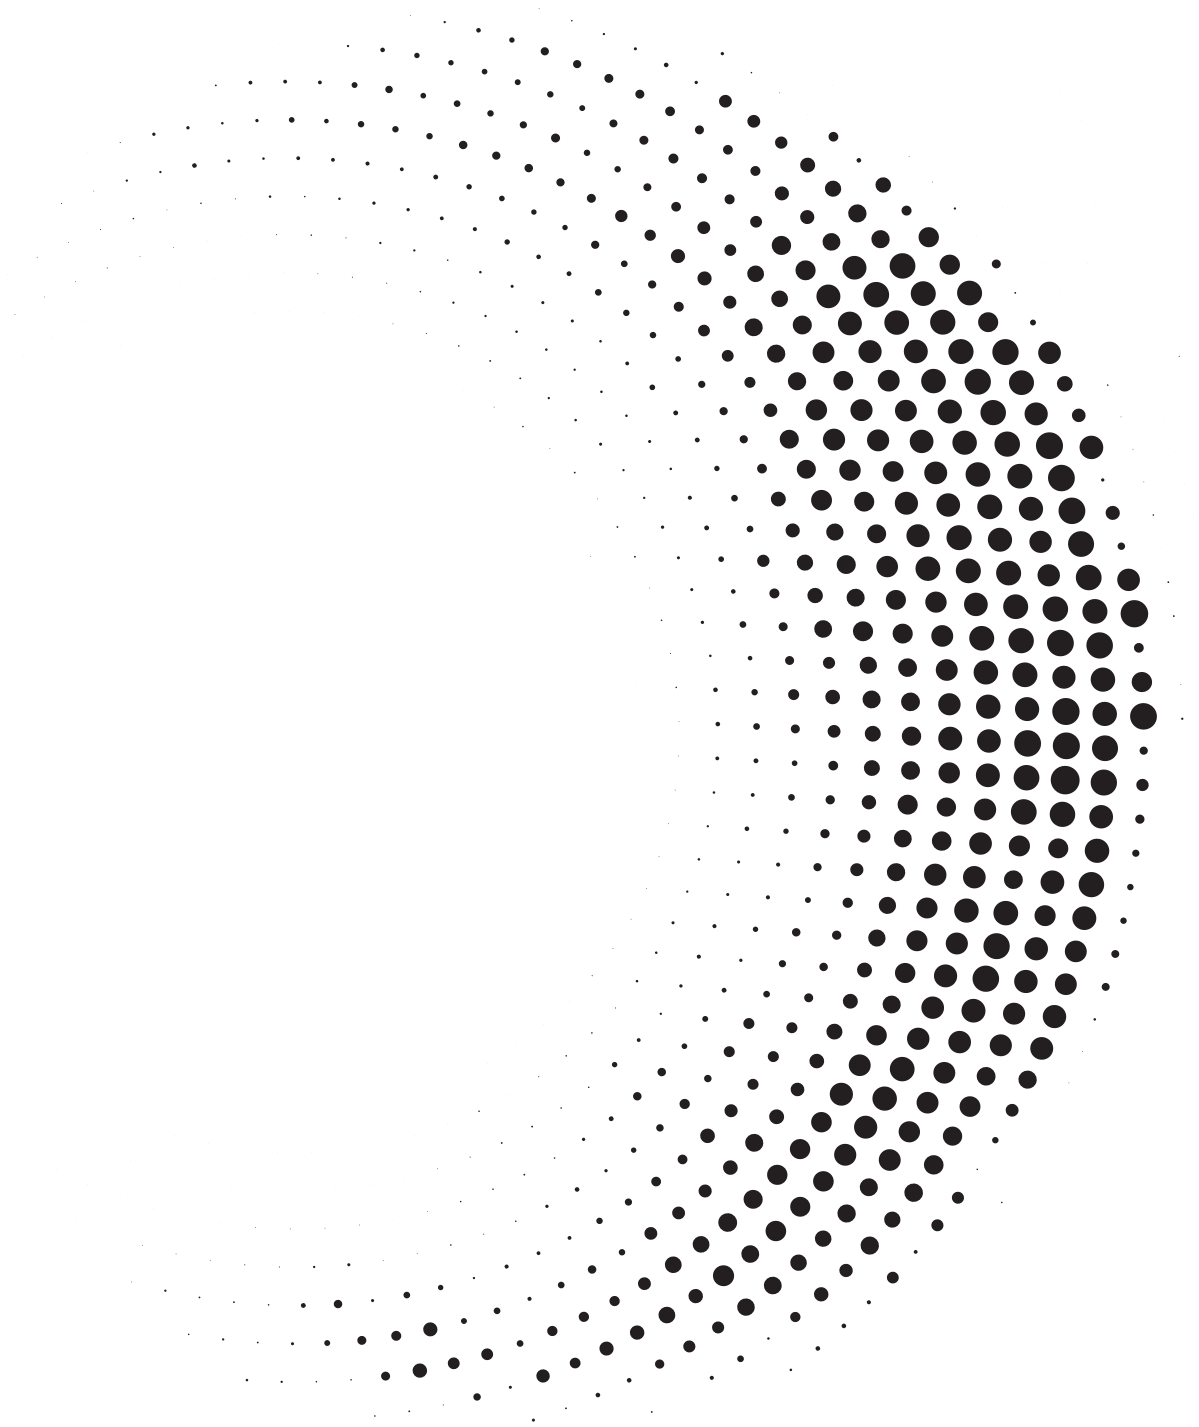

**XAL**


# SEE THE LIGHT

We are passionate about the fascinating medium of light. XAL has focused on the medium in all its diversity, on its optimum adaptation to user requirements and on continual endeavours to roll back the borders of what is technically possible. The results are our aesthetic and functionally outstanding lighting solutions which can be perfectly integrated into all kinds of indoor and outdoor contexts.

In a dynamic environment with highest requirements we offer the necessary process quality, flexibility and internationality to develop sustainable concepts that go far beyond short-lived trends.





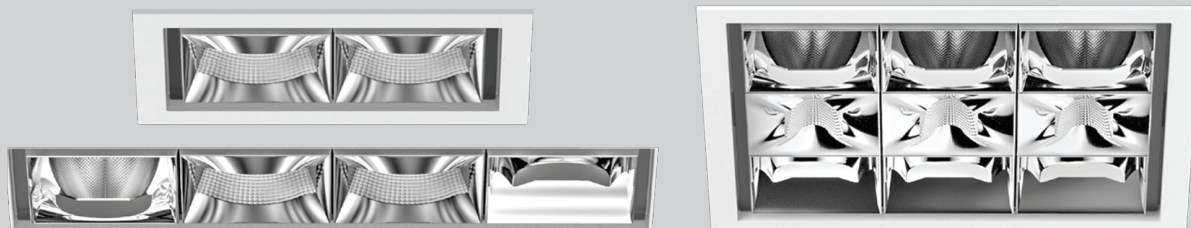

**GENERAL**  
recessed (with trim / trimless)  
6 different mounting housings  
IP 20

**LED**  
High-power LED  
up to 420 lm, 106 lm/W per optic  
3000 K, 4000 K, TW (3000-6000 K)  
CRI ≥ 90  
Binning initial ≤ 3 MacAdam

**ESTIMATED LED LIFETIME**  
L80 / 50 000 h

**OPTICAL**  
direct illumination (UGR < 19)  
9 different optics  
narrow spot 12°  
round light distribution 35/55/75°  
square light distribution 35/55/75°  
rectangular light distribution 35x75°  
wallwasher

**ELECTRICAL**  
non DIM, DIM DALI, ZigBee 3.0



**PHYSICAL**  
aluminium  
powder-coated



The powerful and highly flexible UNICO multiple downlight combines up to nine individually controllable, small 38x38mm LED light insets, with varying emission characteristics and colour temperatures for creating a wide variety of lighting scenarios.

## RECESSED SPOTLIGHTS


### Mounting Housings

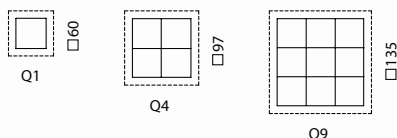

### Dimensions

TYPE	WITH TRIM	CUTOUT	TRIMLESS	CUTOUT
L2	97x60 mm	90x52 mm	83x45 mm	99x62 mm
L4	173x60 mm	166x52 mm	158x45 mm	175x62 mm
L6	248x60 mm	241x52 mm	233x45 mm	250x62 mm
Q1	60x60 mm	52x52 mm	45x45 mm	62x62 mm
Q4	97x97 mm	89x89 mm	83x83 mm	99x99 mm
Q9	135x135 mm	127x127 mm	120x120 mm	137x137 mm


### Optics

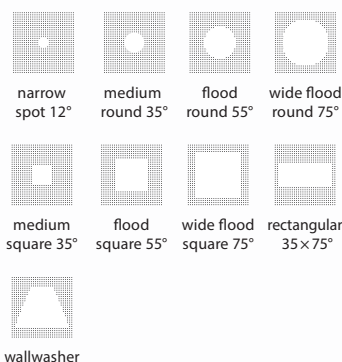

### Features




50 mm  
recess depth



micro-faceted  
reflector



skimmed into plaster  
board ceiling (trimless)



single control via  
X-TALK app

# MOVE IT 25 system

## MODULAR PROFILE LIGHTING SYSTEMS

**GENERAL**  
recessed trimless  
ceiling mounted  
suspended  
IP 20

**LED INSET OPAL**  
Mid-power LED  
up to 3530 lm  
up to 98 lm/W  
3000 K  
CRI > 90  
Binning < 3-Step MacAdam

**ESTIMATED LED LIFETIME**  
L80 / 50 000 h

**OPTICAL**  
direct illumination  
PMMA cover opal  
asymmetric illumination


**ELECTRICAL**  
48V power rail system  
non DIM, DIM DALI, ZigBee 3.0

**PHYSICAL**  
aluminium



MOVE IT 25 is a highly flexible system available for trimless installation in plasterboard ceilings, surface mounting on ceiling structures or as a suspended version with optional indirect light.

### Mounting

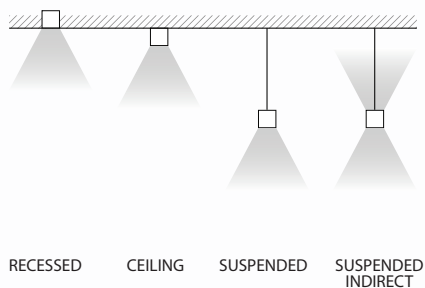

### Examples insets

**JUST 32**  
FOCUS 17-43°



LUMINOUS FLUX  
390lm (8w)

**JUST 45**



LUMINOUS FLUX  
up to 730 lm

**JUST 55**



LUMINOUS FLUX  
up to 2090 lm

**INSET 25 WALL  
WASHER FLUSH**  
L 300, 600, 1200, 2400mm



LUMINOUS FLUX  
up to 2360 lm

**INSET 25 WALL  
WASHER FLUSH**  
L 300, 600, 1200, 2400mm




LUMINOUS FLUX  
up to 3530 lm


### Features



adjust. beam angle  
17-43° (FOCUS)



170° Indirect  
illumination



up to 6 node connections,  
60-90° angle



single control via  
X-TALK app

# PROFILE 60

system



## MODULAR PROFILE LIGHTING SYSTEMS

**GENERAL**  
surface, suspended  
IP20

**LED**  
Mid-power LED  
up to 2450 lm  
up to 114 lm/W  
3000K, 4000K  
CRI ≥ 80  
Binning initial ≤ 3 MacAdam

**ESTIMATED LED LIFETIME**  
L80 / 50 000 h

**OPTICAL**  
direct illumination  
PMMA cover opal  
microprismatic

**ELECTRICAL**  
non DIM, DIM DALI  
transparent feeder cable

**PHYSICAL**  
aluminium  
powdered-coated  
halogen-free cable (internal wiring)



Circular segment of rolled aluminium profile, angular design with 55mm wide light emission, seamlessly welded; no visible screws; designed for continuous lighting systems

### Mounting

OFFSET  
RECESSED



RECESSED



CEILING



SUSPENDED



SUSPENDED  
INDIRECT




### Shapes

LINEAR



CORNER



CURVE



### Light Distribution

OPAL



non DIM  
power switch  
3000 K / 4000 K

MICROPRISMATIC



DIM DALI  
3000 K / 4000 K

WALLWASHER



DIM DALI  
tunable white  
3000 – 6000 K

SPOTLIGHT



non DIM, DIM DALI  
emergency light  
3000 K / 4000 K



# LENO

surface / suspended

Refined technology

## SURFACE MOUNTED AND SUSPENDED LUMINAIRES

**GENERAL**  
surface mounted  
suspended  
IP 20  
quick installation

**LED**  
Mid-power LED  
up to 2007 lm/m  
up to 126 lm/W  
3000 K, 4000k  
CRI ≥ 80  
Binning initial ≤ 3 MacAdam

**ESTIMATED LED LIFETIME**  
L80 / 50 000 h

**OPTICAL**  
direct light 100 %  
HPO PMMA cover opal  
microprismatic (UGR < 19)  
jut-out PMMA cover


**ELECTRICAL**  
DIM DALI  
through wire included

**PHYSICAL**  
aluminium  
powder-coated  
halogen-free cable (internal wiring)



Leno surface / suspended have an overall height of 28mm that can be used individually or as a system. It is simple to work with because of its easy mounting and magnetic fixing for the light inset.

### Dimensions

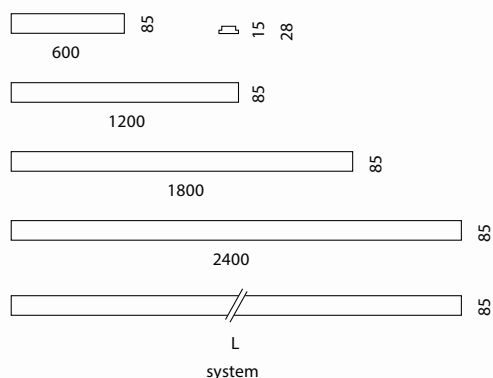

### Features




HPO PMMA cover  
opal



microprismatic cover  
(UGR < 19)



jut-out PMMA cover



magnetic holders for  
tool-free mounting





flat design (28 mm)



quick installation



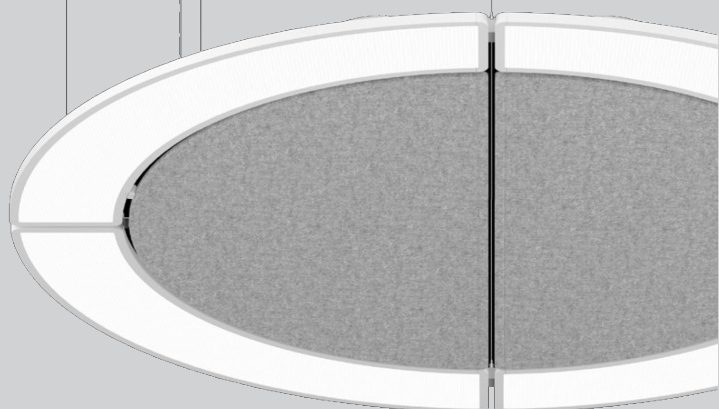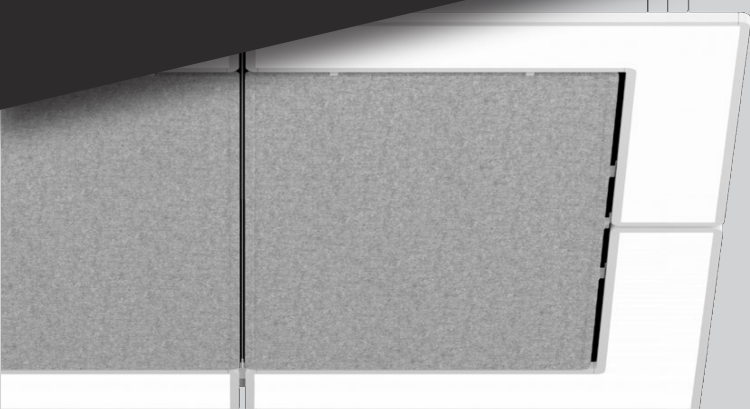

## SURFACE MOUNTED AND SUSPENDED LUMINAIRES

**GENERAL**  
surface mounted, suspended  
inlay for TASK S SYSTEM  
lightweight


**ACOUSTIC**  
absorber  
absorption class B

**PHYSICAL**  
PET felt  
colour range




This highly effective acoustic absorber, made of PET felt in four colour variants and formats, complements the versatile TASK luminaire series.

### Dimensions

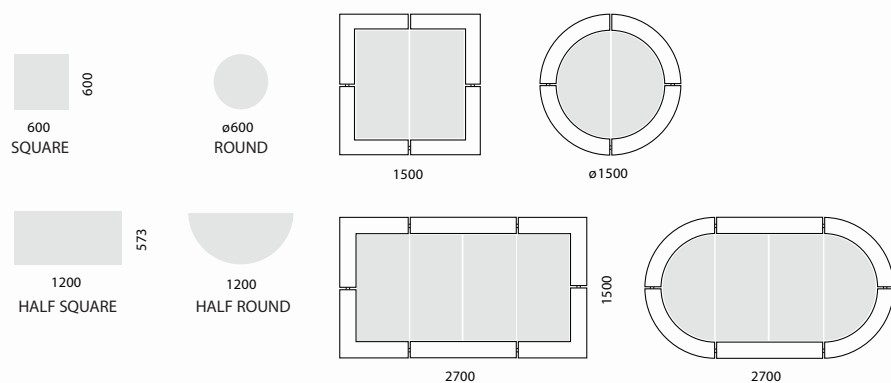


### Features

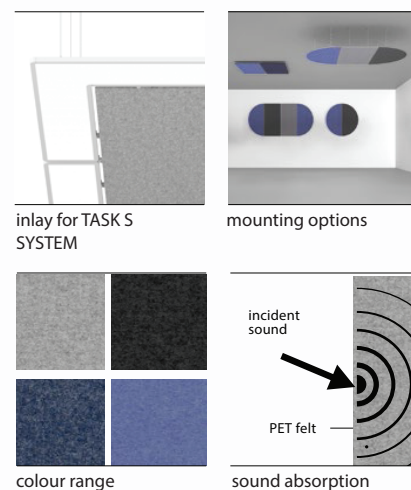

# NOD

suspended

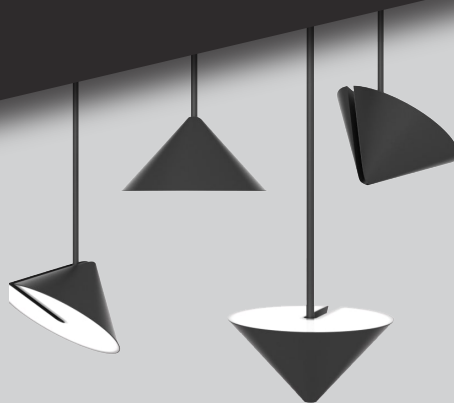

**GENERAL**  
suspended (rod)  
IP 20

**LED**  
Mid-power LED  
up to 95 lm/W  
2700 K, 3000 K  
CRI ≥ 90  
Binning initial ≤ 3 MacAdam

**ESTIMATED LED LIFETIME**  
L80 / 50000 h

**OPTICAL**  
direct light 100%  
PMMA cover opal


**ELECTRICAL**  
non DIM

**PHYSICAL**  
soft touch coated surface  
330° turnable, 180° tiltable


The sleek, minimalistic design of NOD by the young Japanese designer Daisuke Kitagawa strongly reflects the minimalist philosophy of his culture. The decorative fixture follows a traditional cone shape, but sets itself apart with an elegant black soft-touch surface.

## SUSPENDED


### Dimensions

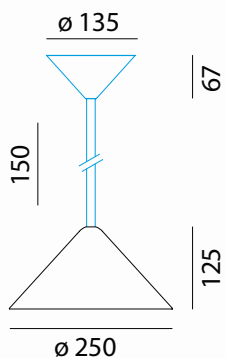


### Light Description




### Features



330° rotatable



180° tiltable



available with  
3-phase adapter



#### SHOWROOM:

670 Florentino Torres Street, Sta. Cruz, Manila  
T: +[632] 8733 8351 to 52 | M: +[63] 915 6024856 +[63] 9175615922

#### HEAD OFFICE:

2/F Le Mar Ben II Building 747 San Bernardo Street, Sta. Cruz, Manila  
T: +[632] 8733 8353 to 56 | M: +[63] 917 55-CENIT (23648)

