

URBAN

STREET LIGHTING

**THEOS / THEOS MINI**

- » 170W LED
- » 21520 lm
- » 4000K
- » CRI70
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 696 x 315 x 193
- » 70W LED
- » 8608 lm
- » 4000K
- » CRI70
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 506 x 245 x 193

**RAY**

UNDERWATER

**AQUA Recessed**

- » 8W LED
- » 600 lm
- » 6500K
- » Control gear (accessories)
1x100 VA 220/240 V 50/60 Hz
safety transformer
- » IP68 (up to 3m)
- » LxWxH (mm) 70 x 105 x 106
- » LxW (mm) 125 x 190


**AQUAMAXI**

- » 30W LED
- » 1800 lm
- » 6500K
- » Control gear (accessories)
1x350 VA 220/240 V 50/60 Hz
safety transformer
- » IP68 (up to 3m)
- » LxWxH (mm) 136 x 100 x 136

INGROUNDS

**CRICKET LED**

- » 10W LED
- » 540 lm
- » 3000K
- » CRI85
- » 220/240 V 50/60 Hz
- » IP 67
- » LxWxH (mm) 274 x 165 x 661

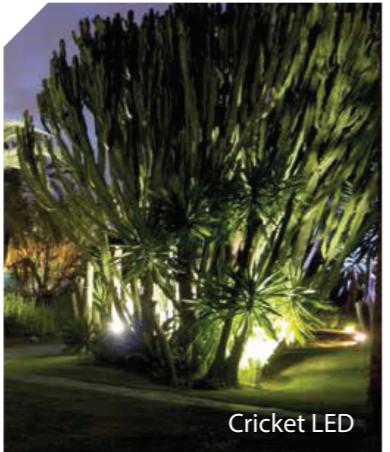**Cricket LED**

PROFESSIONAL

FLOODLIGHT

**RAY**

- » 1000/2000W Metal Halide
- » 7° to 60° Beam Angle
- » Goniometer for aiming purpose
- » 220/240 V 50/60 Hz
- » IP 65 / 66
- » LxWxH (mm) 520 x 480 x 585

**GUELL 1**

- » 39/58W LED
- » 4650 lm/8108lm
- » 3000K/5000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 265 x 85 x 319

**GUELL 2.5**

- » 166W LED
- » 2400 lm
- » 5000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 395 x 90 x 455

**GUELL 3**

- » 212W LED
- » 16686 lm
- » 4000K (3000/5000K available)
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 562 x 98 x 501

**GUELL 4**

- » 430W LED
- » 43532 lm
- » 4000K (3000/5000K available)
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 570 x 100 x 330

**GUELL 4****PERFORMANCE LIGHTING**ARCHITECTURAL | URBAN | PROFESSIONAL
GENERAL OUTDOOR

FLOODLIGHT



FOCUS + ZERO



FOCUS + 1




FOCUS + 2

- » 10W LED
- » 1350 lm
- » 3000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 65
- » LxWxH (mm) 180 x 30 x 132
- » Ground Spike (optional)

- » 18W LED
- » 1247/1242/1180/1307 lm
- » 17°/34°/56°/15°x40° Beam Angle
- » 3000 K
- » CRI70
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 160 x 43 x 223
- » Ground Spike (optional)

- » 26W LED
- » 1960/1953/1824/2052 lm
- » 17°/34°/56°/15°x40° Beam Angle
- » 3000K
- » CRI70
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 220 x 50 x 300

RECESSED WALL



INSERT + ZERO



INSERT+ 1

- » 2W LED
- » 21 lm
- » 3000K
- » 220/240 V 50/60 Hz
- » IP 65
- » LxWxH (mm) 105 x 49 x 75
- » 503 standard recessed box included

- » 7W LED
- » 222 lm
- » 3000K
- » 220/240 V 50/60 Hz
- » IP 65
- » LxWxH (mm) 284 x 59 x 88
- » Accessories: 503 standard recessed box

BOLLARDS



MIMIK 10 POST



PADO



NOTTURNO

- » 11W LED
- » 745 lm
- » 3000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 65
- » LxWxH (mm) 130 x 130 x 653 or 353

- » 20W LED
- » 745 lm
- » 3000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 65
- » ØxH (mm) 208 x 75

- » 20W LED
- » 1623 lm
- » 4000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 66
- » LxWxH (mm) 504 x 52 x 60

LINEAR RECESSED




TRACCIA



GROOVE

- » 20W LED
- » 2000 lm
- » 12° Beam Angle
- » 4000K
- » CRI80
- » 220/240 V 50/60 Hz
- » IP 67
- » LxWxH (mm) 525 x 98 x 160

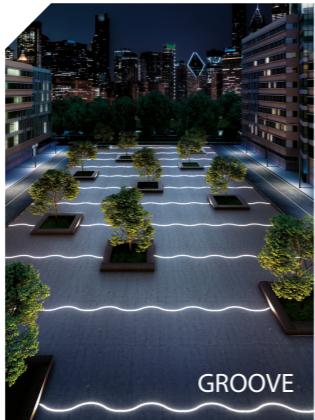


GROOVE

GENERAL OUTDOOR

WALL MOUNTED



MIMIK 10



5W LED

10W LED

451 lm

880 lm

3000K

CR180

220/240 V 50/60 Hz

IP 65

LxWxH (mm) 126 x 42 x 126



MIMIK 20



13.5W LED

24W LED

960 lm

1930 lm

3000K

CR180


220/240 V 50/60 Hz

IP 65

LxWxH (mm) 200 x 42 x 200



MIMIK 30



24W LED

1930 lm

3000K

CR180


220/240 V 50/60 Hz

IP 65

LxWxH (mm) 200 x 42 x 120



QUASAR 10



1W

2 NB 180°

1NB+1W



QUASAR 20



TECH

M

B



POLO+ ZERO




POLO+ 1



MIMIK 10 CEILING



Q-CEILING

C/I
2375 lm
20° Beam AngleSoft
1874 lm10W LED
701/806 lm
3000/4000K
CR180
220/240 V 50/60 Hz
IP 65
LxWxH (mm) 127 x 127 x 6524W LED
3000K
CR180
220/240 V 50/60 Hz
IP 65
LxWxH (mm) 135 x 135 x 200

QUASAR 10 CEILING

5W LED
500lm
4000K
CR180
220/240 V 50/60 Hz
IP 40
LxWxH (mm) 100 x 100 x 100