

ULTRA BLU utilizes the most advanced UV technology. Eliminating 99.99% of bacteria & viruses in water.

ULTRA BLU is the industry's most compact, energy efficient and intelligent UV sterilizer.

ULTRA BLU can be easily installed to upgrade your Point-of-Use dispensing system or filtration system.



ULTRA BLU

water sterilizer

ADVANTAGES OF


ULTRA BLY,

ULTRA BLY,


TRADITIONAL UVS TERILIZER

- Compact fixture with quick-fit inlet and outlet connections for easy installation
- Low mercury content
- Long service life: 6000 operation hours or at least 3 years
- Turns on only when the water passes through – does not increase the temperature on first cup of water and energy efficient
- Equipped with intuitive LED panel signals and control board to ensure device's performance
- Shock-absorbent structure enables pre-installation on water dispensers, water filters, or to be transported individually


- Bulky and difficult to be installed
- High mercury content
- Requires annual lamp replacement with rapid decay of performance.
 Most lamps decay by 25% in 3 months
- Needs to be turned on all the time to be effective. High thermal radiation heats up the water and wastes energy
- High risk of lamp system breakdown without appropriate warning sign
- The lamp inside the housing could be easily broken during transportation

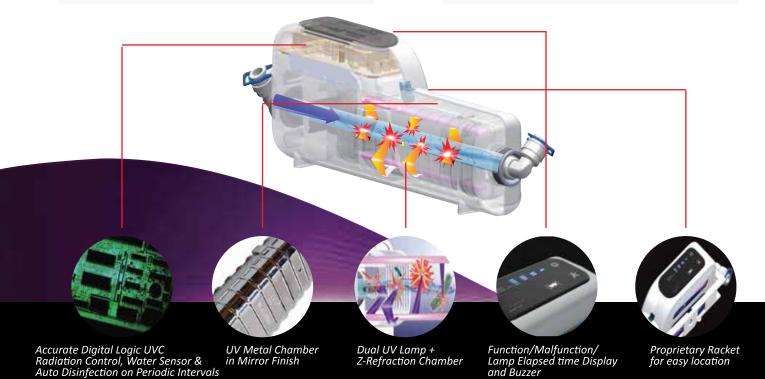



APPLICATIONS





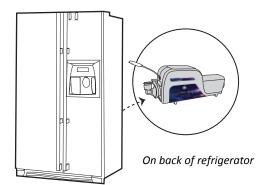

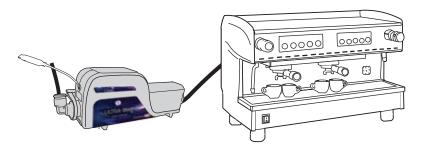


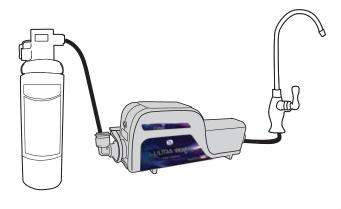






TECHNICAL SPECIFICATIONS







After Single Purifier

After RO Membrane with 2 years usage

After OASIS' Ultra BluV

Potential Contaminant	Disinfection dose
Cholera	6,500 μ,w,sec/cm2
Dysentery	4,200 μ,w,sec/cm2
E.coli	6,600 μ,w,sec/cm2
Salmonella	10, 500 μ,w,sec/cm2
Poliovirus	7, 00 μ,w,sec/cm2
Hepatitis A	8, 000 μ,w,sec/cm2

Ultra BluV DOSE ≥ 30,000 μ,w,sec/cm2

ULTRA BLU

Model	Ultra BluV
Flow Rate in Clear Water	4,5 lpm
Flow Rate in Distilled or RO,UF Water	5,7 lpm
Dosage	30,000μ,w,sec/cm2
Max. Operating Pressure	6,9 bar
Minimum pressure required to start up	0,01 bar based on 200 ml/min flow rate
UV Lamp Service Life hrs	6000 working hrs
Inlet/Outlet port	1/4" Push-in Fitting
Electricity	100V-240V, 50/60HZ - 12 VDC
Power consumption	9.5W





Unit 127 Makati Shangri-La Hotel Shopping Arcade, Ayala Avenue, Makati City T: +(632) 8818 4093 | M: +(63)915 6024856 670 Florentino Torres Street, Sta. Cruz, Manila M: +(63)917 55-CENIT (23648)

info@cenitlighting.com www.cenitlighting.com