




TOKISTAR LIGHTING  
MADE IN JAPAN

Specialist in high-output interior and exterior LED commercial lighting.  
World leader in the design of linear, flexible, low voltage and  
wet-location festoon lighting system.

## The Art of Lighting Innovation



**INDOOR** for Interior Indirect Lightings, Restaurants, Bars, Hotels, and Residential

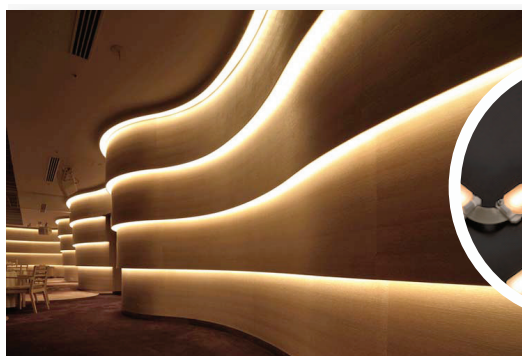


### Advantage XF

Decorative and Indirect

Highly flexible to any contour, twist or turn,  
lightweight, and easy to mount with high-bond  
adhesive tape.

Wattage: 0.72W/LED  
Voltage: 24VDC  
CRI: 80

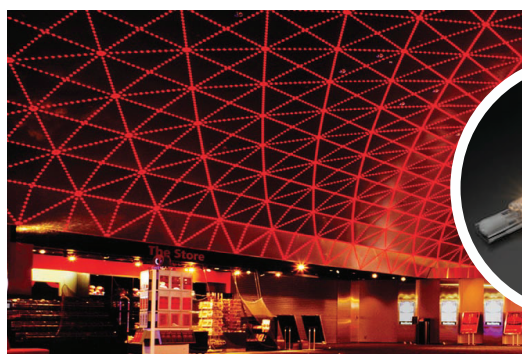

### Cable Lighting

Compact Profile Lighting

Uniform soft illumination highlighting architectural  
details with distinct points of light in locations subject  
to vibration.

Wattage: 0.2W/LED  
Voltage: 8VDC  
CRI Value: 85

## OUTDOOR for Architectural Facades, Exterior Surfaces, Signboard Lightings, and Indirect Lightings



### KromaStar Wash

4-in-1 RGBW LEDs color-changing effects

Single-lens LED producing consistent mixed colors from each light source, addressable using DMX control system.

Wattage: 4W/LED

Voltage: 24VDC

IP rating: IP67



### Reveler



Exterior LED Wall Glazer

An indirect, extremely flexible, and fully dimmable LED lighting fixture capable of outlining any complex shapes.

Wattage: 1.8W/LED

Voltage: 24VDC

IP rating: IP66

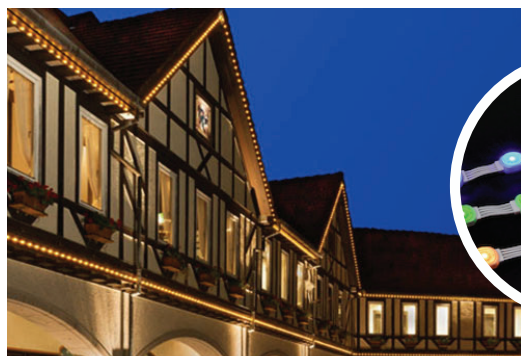

### Trillium


Tri-Color LED Modules

A single RGB light source producing perfectly blended color viewed directly, on a reflective surface, or as backlight.

Wattage: 0.32W/LED

Voltage: 8VDC

IP rating: IP66



### Tapelight

Flexible Low-Voltage Lighting

Low-profile flexible cables, enabling them to fit in small niches and conform to any shape providing accent lighting.

Wattage: 0.1W/LED

Voltage: 8VDC

IP rating: IP65

#### SHOWROOM:

670 Florentino Torres Street, Sta. Cruz, Manila

T: +{632} 8733 8351 to 52 | M: +{63} 915 6024856 +{63} 9175615922

#### HEAD OFFICE:

2/F Le Mar Ben II Building 747 San Bernardo Street, Sta. Cruz, Manila

T: +{632} 8733 8353 to 56 | M: +{63} 917 55-CENIT {23648}