


## FEATURES:


- Resistance to permanent immersion, IP68
- Quick installation, reaccessible and compact, 68mm(L)x23mm(Ø)
- High quality materials UL94 V0/V2. Suitable for underground installation (up to 10 years)
- UV radiation resistant
- Anti leakage gasket
- Resin-gel free
- Halogen free-Silicone free
- EN 60998



## ADVANTAGES:

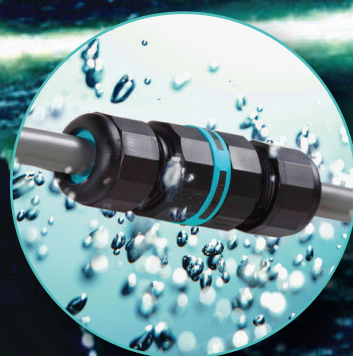

Stability against condensation and moisture inside the cable.

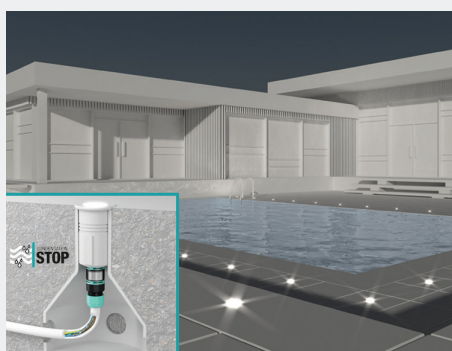


Total protection against permanent submersion and pressure water.



Resistance to penetration of atmospheric agents and dust.



## QUICK INSTALLATION:

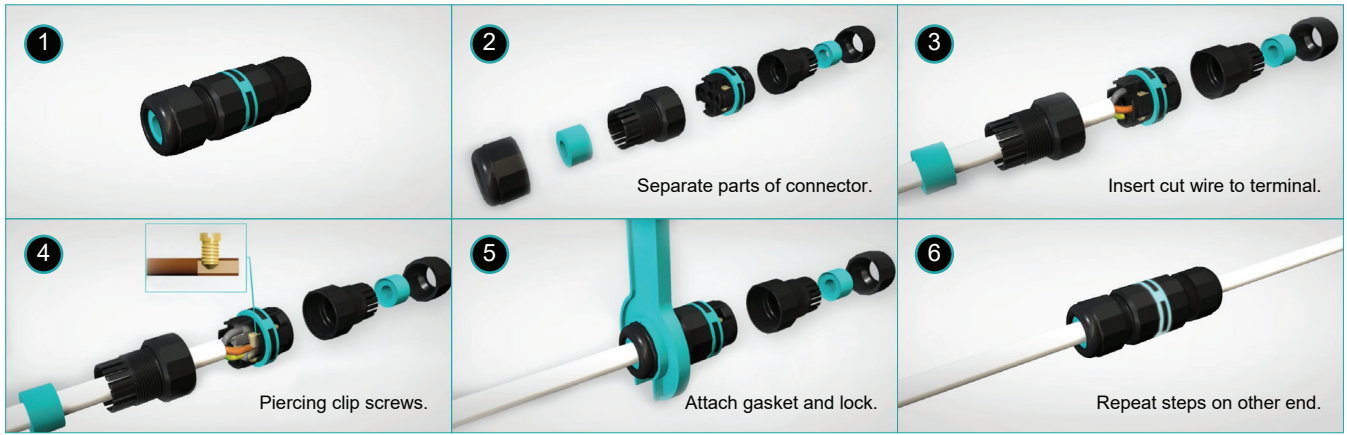

Connection: In-line  
 Installation: Plug & socket  
 Number of Poles: 4  
 Operating current: max. 17.5A  
 Operating voltage: max. 450V AC  
 Cable diameter (min-max): 6.0mm - 13.5mm  
 IP Protection: IP68



Connection: In-line  
 Installation: Fixed connectors (re-accessible)  
 Number of Poles: 4  
 Operating current: max. 32A  
 Operating voltage: max. 450V AC  
 Cable diameter (min-max): 7.0mm - 12mm  
 IP Protection: IP68



Connection: 4-way junction  
 Installation: Fixed connectors (re-accessible)  
 Number of Poles: 4  
 Operating current: max. 17.5A  
 Operating voltage: max. 450V AC  
 Cable diameter (min-max): 7.0mm - 13.5mm  
 IP Protection: IP68



Connection: 3-way junction  
 Installation: Fixed connectors (re-accessible)  
 Number of Poles: 4  
 Operating current: max. 32A  
 Operating voltage: max. 450V AC  
 Cable diameter (min-max): 7.0mm - 13.5mm  
 IP Protection: IP68

### SHOWROOM:

670 Florentino Torres Street, Sta. Cruz, Manila  
 T: +{632} 8733 8351 to 52 | M: +{63} 915 6024856 +{63} 9175615922

### HEAD OFFICE:

2/F Le Mar Ben II Building 747 San Bernardo Street, Sta. Cruz, Manila  
 T: +{632} 8733 8353 to 56 | M: +{63} 917 55-CENIT {23648}