



ARCHITECTURAL  
GENERAL OUTDOOR  
URBAN | PROFESSIONAL  
LIGHTING SOLUTIONS

Exclusively distributed by:





# PERFORMANCE **iN** LIGHTING

powered by



PERFORMANCE iN LIGHTING is an international group based in Colognola ai Colli, in the province of Verona with important manufacturing sites in Germany, Belgium and the USA. With over 700 employees and numerous affiliated companies which allow us to have a global vision on the lighting world.

An international voice with a stylistic approach well anchored in “Made in Italy” and a technological research worthy of the best “Made in Germany”.



Cenit was established in 1992 and began as a lighting distributor, representing prestigious global brands from Europe and the USA to offer a full range of indoor and outdoor lighting solutions for commercial, institutional, residential, infrastructure, public spaces, and other applications for the Philippine market.

The Cenit team regularly undergoes extensive product training to develop the expertise to provide customers safe, reliable, energy efficient, and cost-effective solutions that meet project and budget requirements while fulfilling the project’s vision and goals.

Cenit provides customer services covering technical consultation, basic lighting calculation, product installation assistance, and maintenance service support.

Today, the company is expanding its product and solutions portfolio and introducing innovative new products to serve its customers better.

## ARCHITECTURAL

Technology, design, and innovation. Our lighting systems emphasize shapes and enhance the material for a unique final result: shaping an idea.



## GENERAL OUTDOOR

Lighting for residential contexts, historic homes, holiday homes and gardens: the outdoor lighting design includes a variety of solutions suited to each context.

## URBAN

A custom-made lighting solution for each urban area: streets, car parks, squares, green areas, playgrounds, bridges, pedestrian streets. Urban lighting systems that combine collective and individual interests.



## PROFESSIONAL

From the lighting of sports facilities to airport lighting, from stadiums to the façades of the most important buildings: where the complexity and technological innovation comes into play, and the extent of the range of characteristics is the key.

# ARCHITECTURAL



NEW



**KHA SLIM**  
Bollard

- 13W LED
- 483 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- DxH (mm)  
90Ø x 2220



**MIMIK POST 300**  
Bollard

- 10W LED
- 745 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
130 x 130 x 353



**MIMIK POST 600**  
Bollard

- 10W LED
- 1006 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
130 x 130 x 653

NEW



**PADO**  
Bollard

- 20W LED
- 1080 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- DxH (mm)  
208Ø x 75



**TYK + 10 C/I**  
Floodlight

- 7W LED
- 650 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
105 x 65 x 131

NEW



**TYK + 20 C/I**  
Floodlight

- 50W LED
- 4255 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
234 x 114 x 2745



**FOCUS ZERO**  
Floodlight

- 10W LED
- 611 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
80 x 30 x 132



**FOCUS+1**  
Floodlight

- 18W LED
- 1680 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
160 x 43 x 223



**STRIP SQUARE**  
Linear Wall

- 26W LED
- 2660 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
1032 x 71 x 70



**CRICKET + 10**  
Ingrounds

- 5W LED
- 415 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP67
- DxH (mm)  
105Ø x 82



**CRICKET + 20**  
Ingrounds

- 26W LED
- 2177 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP67
- ØxH (mm)  
270Ø x 145



**TRACCIA**  
Linear Recessed

- 20W LED
- 1530 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP67
- LxWxH (mm)  
525 x 98 x 160



NEW



**SHIELD + 1**  
Wall Mounted

- 13/19/27W LED
- 2808 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
220 X 114 X 230

NEW



**ORION V B NB**  
Wall Mounted

- 10W LED
- 243 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
90 x 50 x 120



**POLO + 1**  
Wall Mounted

- 11.5W LED
- 474 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
151 x 58 x 80




**INSERT ZERO**  
Recessed Wall

- 4.5W LED
- 125 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
107 x 49 x 75




**INSERT + 1**  
Recessed Wall

- 6W LED
- 222 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
224 x 64 x 55



**MIMIK 10**  
Wall Mounted

- 5/10W LED
- 451/880 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
126 x 42 x 126



**MIMIK 20**  
Wall Mounted

- 13.5/24W LED
- 960/1930 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
200 x 42 x 200



**QUASAR 10**  
Wall Mounted

- 3.0/6W LED
- 92/150 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP44
- LxWxH (mm)  
100 x 100 x 100



**QUASAR 10 CEILING**  
Ceiling Surface Mounted

- 50W LED
- 500lm
- 4000K
- CRI80
- 220-240V 50/60 Hz
- IP40
- LxWxH (mm)  
100 x 100 x 100



**MIMIK 10**  
Ceiling Surface Mounted

- 10W LED
- 701/806 lm
- 3000/4000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
127 x 127 x 65



**MIMIK 20**  
Ceiling Surface Mounted

- 23.5W LED
- 1721 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
200 x 200 x 42



**Q-CEILING**  
Linear Recessed

- 24W LED
- 1874/2374 lm
- 3000K
- CRI85
- 220-240V 50/60 Hz
- IP65
- LxWxH (mm)  
135 x 135 x 200

# URBAN



NEW



**HEDO + C**  
Street Lighting

- 42W LED
- 3710 lm
- 3000K
- CRI80
- 220-240V 50/60 Hz
- IP65
- ØxH (mm)
- 330 x 475

NEW



**KREOS**  
Street Lighting

- 63W LED
- 7930 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)
- 536 x 300 x 268

NEW



**KYRO+**  
Street Lighting

- 70W LED
- 9205 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)
- 690 x 275 x 131




**THEOS GLASS**  
Street Lighting

- 136W LED
- 19284 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)
- 696 x 315 x 193



**THEOS MINI GLASS 35W**  
Street Lighting

- 35W LED
- 4903 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)
- 506 x 280 x 193

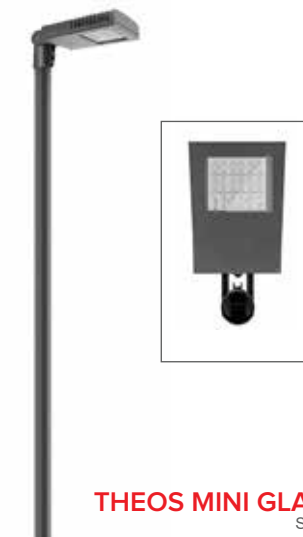

**THEOS MINI GLASS 71W**  
Street Lighting

- 71W LED
- 8490 lm
- 3000K
- CRI70
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)
- 506 x 280 x 193



**NEW**



**LASER +20**  
Spotlight

- 1060W LED
- 169600 V lm
- 5700K
- CRI70
- 220/240V 50/60 Hz
- IP66
- LxWxH (mm)  
562 x 98 x 501

**NEW**



**LASER +30**  
Spotlight

- 1592W LED
- 254700 lm
- 5700K
- CRI90
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
730 x 785 x 440



**GUELL 1**  
Spotlight

- 39/58W LED
- 3487/6092 lm
- 3000/5000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
265 x 85 x 319



**GUELL 2.5**  
Spotlight

- 150W LED
- 24950 lm
- 5000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
395 x 90 x 455



**GUELL 3**  
Spotlight

- 212W LED
- 16686 lm
- 4000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
533 x 58 x 501



**GUELL 4**  
Spotlight

- 430W LED
- 43532 lm
- 4000K
- CRI80
- 220-240V 50/60 Hz
- IP66
- LxWxH (mm)  
570 x 100 x 330




# PROJECT REFERENCES



KHA SLIM



FOCUS + 1



INSERT + 1



SHIELD + 1



LASER + 30